



SPECIFICATION SHEET



Platform Height	22,73 m
Horizontal Outreach	18,00 m
Swing (Continuous)	360°
Platform Capacity – Unrestricted	230 kg
Platform Rotator (Hydraulic)	170°
Jib – Overall Length	n.a.
Jib - Range of articulation	n.a.
A, Platform Size	1,22 m x 4,06 m
B, Overall Width	2,49 m
C, Tailswing (working condition)	1,42 m
D, Stowed Height	3,02 m
E, Stowed Length	12,23 m
F, Wheelbase	3,05 m
G, Ground Clearance	0,28 m
Machine weight	15,950 kg
Maximum Ground Bearing Pressure	5,9 kg/cm ²
Drive Speed 4WD	3,5 km/h
Gradeability 4WD	45%
Tyres	18 - 625 Foam Filled
Axle Oscillation	0,20 m
Turning Radius – Inside	3,81 m
Turning Radius – Outside	6,02 m
Electric motor	80 V - 28 kW
Noise level travelling	78 dBa
Noise level boom movements	72 dBa
Battery capacity	775 Ah
Charging time batteries	8 – 10 h
Discharge warning system	yes
Hydraulic System	227 l
Auxiliary Power	12V DC

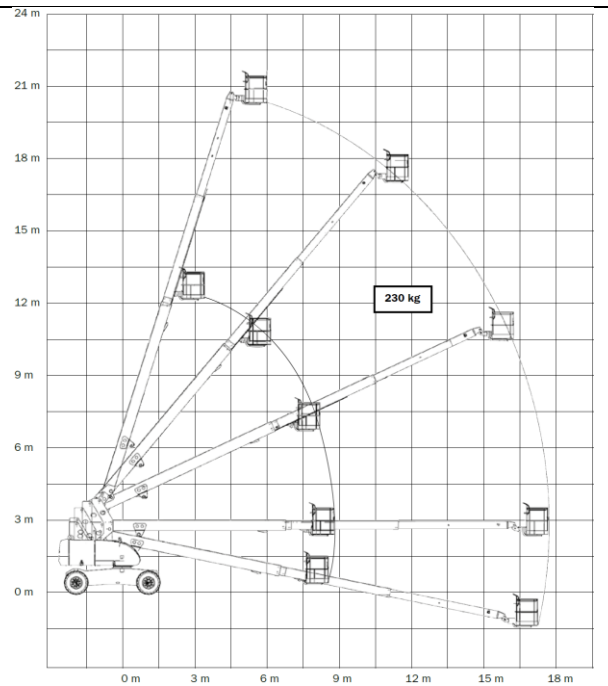

E680S

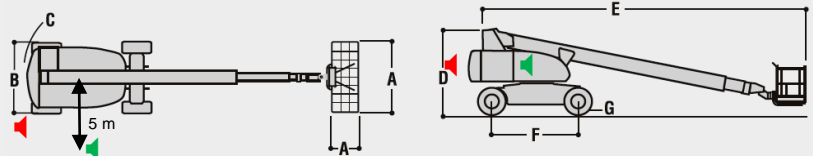

ZERO EMISSION



SPS is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight and/or dimensions. Specifications may change to meet country standards or with the addition of optional equipment.

Smart Platform Solutions B.V. • Leusveld 104 • NL-2151 JX Nieuw-Vennep • the Netherlands
 e-mail: info@sps-bv.nl • KvK Amsterdam: 60295449 • BTW: NL8538.47.605
 IBAN: NL08INGB 0006.3461.01 • BIC: INGBNL2A000