



SPECIFICATION SHEET



Platform Height	11,91 m
Horizontal Outreach	10,86 m
Swing (Continuous)	360°
Platform Capacity – Unrestricted	270 kg
Platform Rotator (Hydraulic)	180°
Jib – Overall Length	n.a.
Jib - Range of articulation	n.a.
A, Platform Size	0,8 m x 4,0 m
B, Overall Width	2,24 m
C, Tailswing (working condition)	0,93 m
D, Stowed Height	2,16 m
E, Stowed Length	8,55 m
F, Ground Clearance	0,32 m
Machine weight	6.600 kg
Maximum Ground Bearing Pressure	3,62 kg/cm ²
Drive Speed	2,6 km/h
Gradeability	51%
Tracks	Rubber or steel
Track width	0,40 m
Turning Radius	Zero
Diesel Engine	Deutz D2.3 L3 Stage IIIA
Fuel Tank Capacity	83 l
Hydraulic System	136 l
Auxiliary Power	12V DC

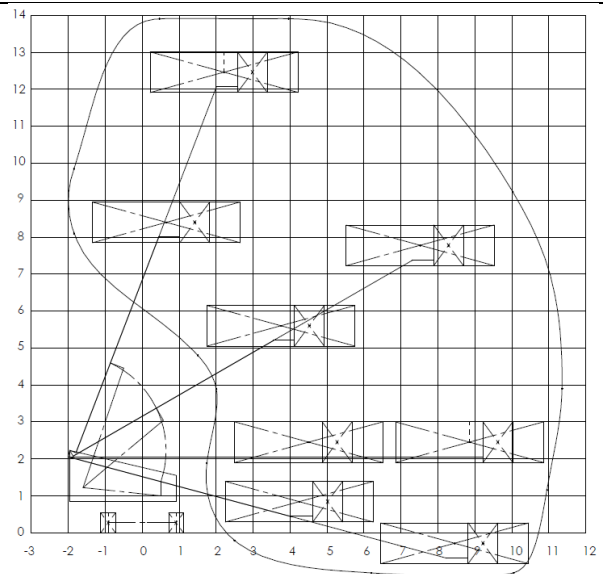

P400SC

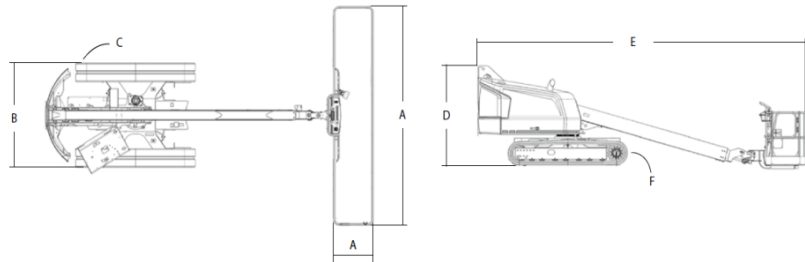

SPS is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight and/or dimensions. Specifications may change to meet country standards or with the addition of optional equipment.

Smart Platform Solutions B.V. • Leusveld 104 • NL-2151 JX Nieuw-Vennep • the Netherlands
 e-mail: info@sps-bv.nl • KvK Amsterdam: 60295449 • BTW: NL8538.47.605
 IBAN: NL08INGB 0006.3461.01 • BIC: INGBNL2A000